


The LD series is ideal for medium sized marinas, offering superior performance and the ability to service multiple vessels simultaneously.




## LD125

Ideal for medium sized marinas.

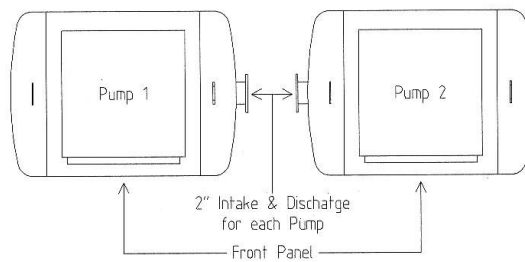


## LD125-2T

Double tank system providing constant flow.

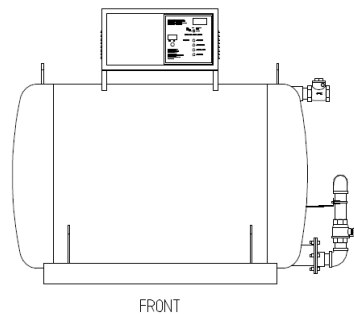

## LD125C

Pump for discharge head up to 120ft (36m).

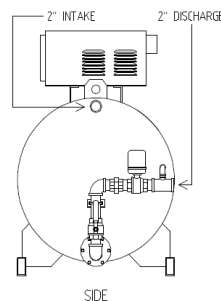

## LD240

Ideal for medium sized marinas.

Waubashene, Ontario  
CANADA

**Tel:** 705.538.1495

**Toll Free:** 800.663.1624  
(Canada & US Only)

**Fax:** 705.538.1776

**www.wmwpump.com**

<b>STANDARD EQUIPMENT</b>	<b>LD125</b>	<b>LD125C</b>	<b>LD125-2T</b>	<b>LD240</b>
Motor	2 or 1½ Hp electric	2 or 1½ Hp electric + 2Hp electric compressor	2 x 2 or 1½ Hp electric	2 or 1½ Hp electric
Tank	115 US Gal. (435l)	115 US Gal. (435l)	2 x 115 US Gal. (435l)	220 US Gal. (832l)
Connections (Intake & Discharge)	2" NPT	2" NPT	2" NPT	2" NPT
Finish	White or Blue Metallic	White or Blue Metallic Top Hot Dipped Galv. Cycle Tank	White or Blue Metallic Top Hot Dipped Galv. Cycle Tank	White or Blue Metallic Top Hot Dipped Galv. Cycle Tank
Accessories (Incl.)	33 ft Intake Hose Assembly	33 ft Intake Hose Assembly		33 ft Intake Hose Assembly
	2 Sizes Deck Adapters	2 Sizes Deck Adapters	None	2 Sizes Deck Adapters
	Universal Deck Adapter	Universal Deck Adapter		Universal Deck Adapter
	Potty Wand	Potty Wand		Potty Wand

**PERFORMANCE SPECIFICATIONS**

Max. Suction Lift (recommended)	20 ft (6 m)	20 ft (6 m)	20 ft (6 m)	20 ft (6 m)
Max. Suction Distance (recommended)	1500 ft (450 m)	1500 ft (450 m)	1500 ft (450 m)	1500 ft (450 m)
Max. Suction Performance*	90 GPM (340 l/min)	90 GPM (340 l/min)	90 GPM (340 l/min)	90 GPM (340 l/min)
Max. Discharge Head	30 ft (9 m)	30 ft (9 m)	30 ft (9 m)	30 ft (9 m)
Max. Discharge Distance (recommended)	2000 ft (600 m)	2000 ft (600 m)	2000 ft (600 m)	2000 ft (600 m)
No. of Boats Serviceable at Same Time	2	2	2	2

**DIMENSIONS**

Width	34" (87 cm)	42" (107 cm)	30" (76 cm)	36" (92 cm)
Length	60" (153 cm)	60" (153 cm)	140" (356 cm)	72" (183 cm)
Height	50" (128 cm)	50" (128 cm)	50" (128 cm)	55" (140 cm)
Tank Diameter	30" (76 cm)	30" (76 cm)	30" (76 cm)	36" (92 cm)
Empty Weight	550 lbs (250 kg)	700 lbs (320 kg)	1100 lbs (500 kg)	890 lbs (405 kg)
Full Weight	1530 lbs (695 kg)	1680 lbs (770 kg)	3060 lbs (1390 kg)	2800 lbs (1273 kg)
Intake Port	2"	2"	2"	2"
Discharge Port	2"	2"	2"	2"

\* performance (in US gallons/minute) through full intake port @ 0 ft vertical lift, 1725 rpm

**Standard Features**

- Auto cycling between suction and discharge
- Constant vacuum – automatic shutoff when maximum vacuum is reached
- Probe error warning sensor
- Odourless – odour vented to discharge line
- Easy single switch operation
- Indicator lights monitoring pump modes
- Power Requirements: 208-230V AC + Neutral, 60Hz (other voltages available)
- Motorized ball valve

**Optional Equipment Available**

- Remote box or stand for multiple intake locations
- Motorized ball valve
- Token, coin or card reader operation
- Auto discharge including suction nozzle
- Single hand operated suction nozzle
- Cycle tank galvanizing and dual coating options available

All WMW control boxes have been UL approved.

Specifications subject to change without notice.

